

SOT-23 Plastic-Encapsulate Switching Diode

Features

- 50nS; Fast Switching Device (TRR <50 nS)
- 250mW; Power Dissipation of 250mW
- High Stability and High Reliability
- Low reverse leakage



RoHS
COMPLIANT



Marking:

SOT-23



BAS19: JP
BAS20: JR

Mechanical Data

- SOT-23 Small Outline Plastic Package
- Epoxy UL: 94V-0
- Mounting Position: Any

Pin definition

Equivalent circuit



Maximum Ratings & Electrical Characteristics (T_A=25°C unless otherwise noted)





Parameter	Symbol	Value		Unit
		BAS19	BAS20	
Reverse Voltage	V _R	100	150	V
Peak Repetitive Reverse Voltage	V _{RRM}	120	200	V
Power Dissipation	P _D	250		mW
Average Rectified Current	I _O	200		mA
Peak Forward Surge Current@tp=1us; TA=25°C	I _{FSM}	2.5		A
Operating junction temperature range	T _J	150		°C
Storage temperature range	T _{STG}	-55 to +150		°C
Thermal Resistance from Junction to Ambient	R _{θJA}	500		°C/W

Electrical Specifications (T_A=25°C unless otherwise noted)

Parameter	Symbol	Test Conditions		Limits		Unit
				Min	Max	
Reverse Voltage	V _(BR)	BAS19	I _R =100uA	100		V
		BAS20		150		V
Forward Voltage	V _F	I _F =100mA			1.00	V
		I _F =200mA			1.25	V
Reverse Leakage Current	I _R	BAS19	VR=100V		0.1	uA
		BAS20	VR=150V			
Typical junction capacitance	C _J	VR=0V, f=1MHZ			2	pF
Typical reverse recovery time	T _{RR}	I _F =I _R =30mA RL=100Ω IRR=0.1 X I _R			50	nS


Ratings and Characteristics Curves

($T_A = 25^\circ\text{C}$ unless otherwise noted)

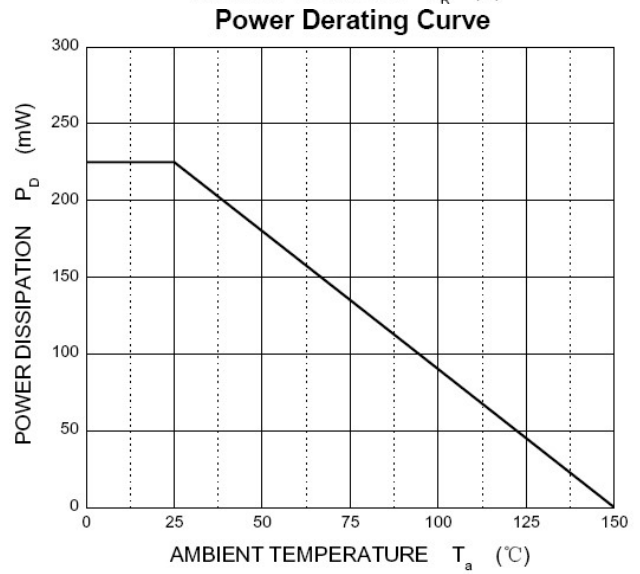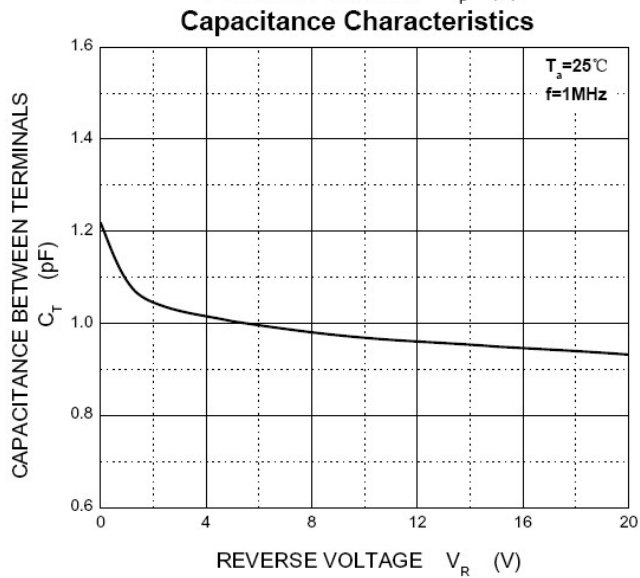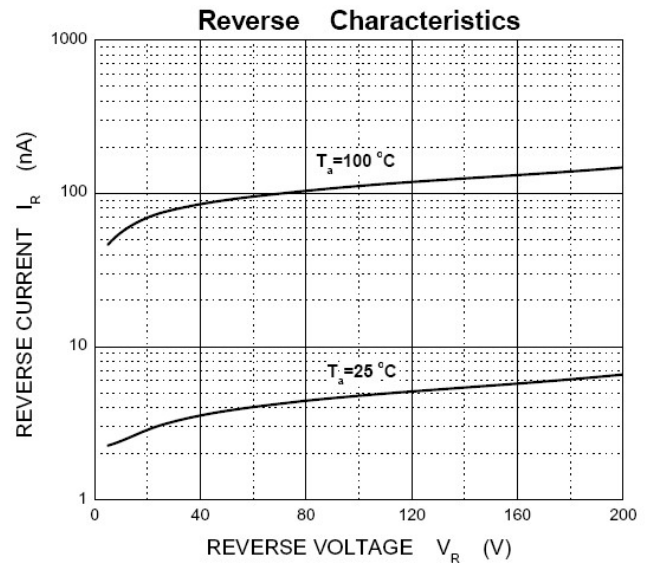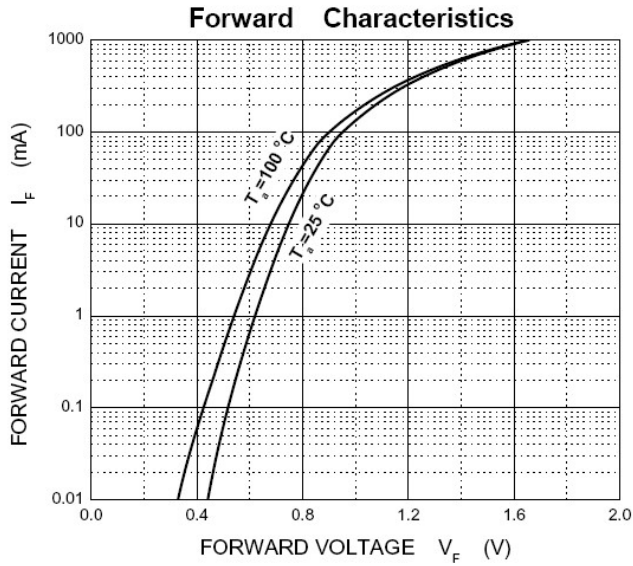

Package Outline Dimensions

in inches (millimeters)

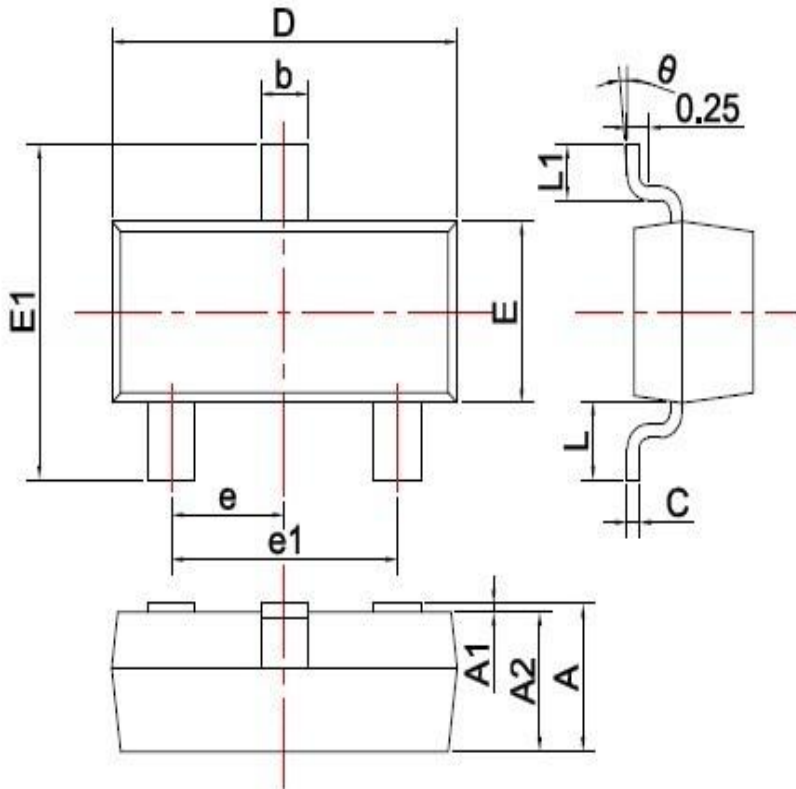

SYMBOL	DIMENSIONS	
	MIN.	MAX.
A	0.900	1.150
A1	0.000	0.100
A2	0.900	1.050
b	0.300	0.500
c	0.080	0.150
D	2.800	3.000
E	1.200	1.400
E1	2.250	2.550
e	0.950TYP	
e1	1.800	2.000
L	0.550REF	
L1	0.300	0.500
θ	0°	8°

Unit: mm

Revision History

Document Version	Date of release	Description of changes
Rev.A	2017.02.17	First issue

Disclaimers

These materials are intended as a reference to assist our customers in the selection of the Suzhou Good-Ark product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Suzhou Good-Ark Electronics Co., Ltd. or a third party.

Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.

All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Suzhou Good-Ark Electronics Co., Ltd. without notice due to product improvements or other reasons. It is therefore recommended that customers contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized Suzhou Good-Ark Electronics Co., Ltd. for the latest product information before purchasing a product listed herein. The information described here may contain technical inaccuracies or typographical errors. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors. Please also pay attention to information published by Suzhou Good-Ark Electronics Co., Ltd. by various means, including our website home page.

(<http://www.goodark.com>)

When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, Please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.

The prior written approval of Suzhou Good-Ark Electronics Co., Ltd. is necessary to reprint or reproduce in whole or in part these materials.

Please contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized distributor for further details on these materials or the products contained herein.