

100mA,100V Schottky Diodes

Features

- Low leakage current
- Schottky barrier diodes
- Low forward voltage drop
- For general purpose applications
- Moisture sensitivity: level 1, per J-STD-020
- For fast switching and low logic level applications
- High temperature soldering guaranteed: 260 ℃/10 seconds



DO-35(DO-204AH)

Applications

- HF-Detector, Protection circuit
- DC/DC converter for notebooks
- Small battery charger, Power supplies

| Maximum Ratings & Electrical Characteristics(TA=25°C unless otherwise noted) | | | | |
|--|------------------|-------------|------|--|
| Parameter | Symbol | BAT41 | Unit | |
| Maximum repetitive peak reverse voltage | V_{RRM} | 100 | ٧ | |
| Forward continuous current | lF | 100 | mA | |
| Repetitive peak forward current at tp<1s, δ<0.5 | I _{FRM} | 350 | mA | |
| Power dissipation (infinite heatsink) | P _{tot} | 400 | mW | |
| Surge forward current at tp<10ms | I _{FSM} | 750 | mA | |
| Maximum junction temperature | TJ | 125 | °C | |
| Storage temperature range | Tstg | -65 to +150 | °C | |

| Thermal-Mechanical Specifications (TA=25°C unless otherwise noted) | | | | |
|--|-------------------|-----|-------|--|
| Parameter | Symbol | Тур | Unit | |
| Thermal Resistance, Junction to Ambient | R _θ JA | 300 | °C /W | |



GOOD-ARK Electronics

| Electrical Specifications(TA=25°C unless otherwise noted) | | | | | | |
|---|------------------|---|-----|------|------|--|
| Parameter | Symbol | Test Conditions | Тур | Max | Unit | |
| Maximum forward voltage pulse test tp<300us,δ<2% | V _F | I _F =10mA | - | 0.45 | V | |
| | | I _F =200mA | - | 1.00 | V | |
| Maximum leakage current pulse test tp<300us, δ<2% | I _R | V _R =50V T _J =25℃ | - | 0.10 | · uA | |
| | | V _R =50V T _J =100℃ | - | 20 | | |
| Typical junction capacitance | C _{tot} | 1 V 1 MHZ | 2 | | рF | |
| Maximum reverse recovery time | t _{rr} | $I_F=I_R=10$ mA $I_T=1$ mA, $RL=100$ Ω | 5 | | nS | |

Note:


1. Valid provided that electrodes are kept at ambient temperature.








Ratings and Characteristics Curves

(TA = 25°C unless otherwise noted)

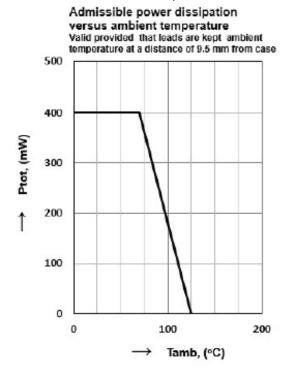

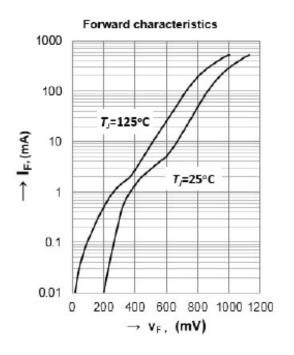

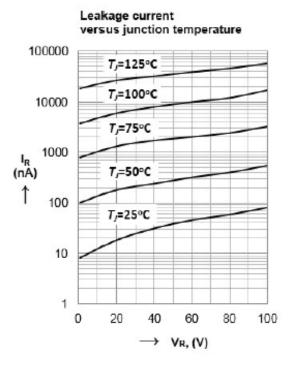

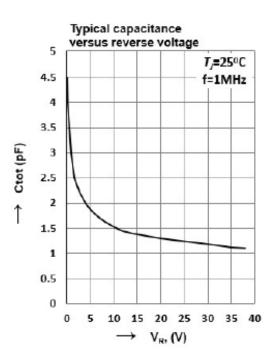




Package Outline Dimensions

in inches (millimeters)

DO-35 (DO-204AH)

CASE DIMENSION (DO-35 Type, 52mm), Unit: mm

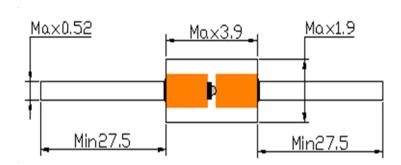

Revision History

| Document Version | Date of release | Description of changes |
|------------------|-----------------|------------------------|
| Rev.A | 2021.06.01 | Released Datasheet |
| Rev.B | 2023.10.31 | Modify document format |





Disclaimers

These materials are intended as a reference to assist our customers in the selection of the Suzhou Good-Ark product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Suzhou Good-Ark Electronics Co., Ltd.or a third party.

Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.

All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Suzhou Good-Ark Electronics Co., Ltd. without notice due to product improvements or other reasons. It is therefore recommended that customers contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized Suzhou Good-Ark Electronics Co., Ltd. for the latest product information before purchasing a product listed herein. The information described here may contain technical inaccuracies or typographical errors. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors. Please also pay attention to information published by Suzhou Good-Ark Electronics Co., Ltd. by various means, including our website home page.

(http://www.goodark.com)

When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, Please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.

The prior written approval of Suzhou Good-Ark Electronics Co., Ltd. is necessary to reprint or reproduce in whole or in part these materials.

Please contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized distributor for further details on these materials or the products contained herein.