

# **SOT-23 Plastic-Encapsulate Switching Diode**

# **Features**

• 50nS; Fast Switching Device (TRR <50 nS)

• 225mW; Power Dissipation of 225mW

• High Stability and High Reliability

• Low reverse leakage





Marking:

**SOT-23** 

### **Mechanical Data**

• SOT-23 Small Outline Plastic Package

• Epoxy UL: 94V-0

• Mounting Position: Any

### **Pin definition**

#### **Epuivalent circuit**



BAS21	BAS21A	BAS21C	BAS21S	
1 ○ → → 3	1 - 4 3	1 ∘ → → 3	1 0 → 3	
2 0	2∘ ◀	2 ○ ▶	2 ○   ◀	
MARKING: JS	MARKING:JS2	MARKING:JS3	MARKING:JS4	
JS	JS2	JS3	JS4	


Maximum Ratings & Electrical Characteristics <sub>(TA=25°C unless otherwise noted)</sub>				
Parameter	Symbol	Value	Unit	
Reverse Voltage	$V_R$	250	V	
Peak Repetitive Reverse Voltage	$V_{RRM}$	250	V	
Power Dissipation	P <sub>D</sub>	225	mW	
Non-repetitive Peak Forward Current	I <sub>FM</sub>	400	mA	
Repetitive peak forward surge current	I <sub>FRM</sub>	625	mA	
Peak Forward Surge Current@tp=1us; TA=25°C	I <sub>FSM</sub>	2.5	А	
Operating junction temperature range	TJ	150	°C	
Storage temperature range	T <sub>STG</sub>	-55 to +150	°C	
Thermal Resistance from Junction to Ambient	Reja	555	°C/W	

Electrical Specifications(TA=25°C unless otherwise noted)						
Parameter	Symbol	Test Conditions	Limits		Unit	
			Min	Max		
Reverse Voltage	$V_{(BR)}$	I <sub>R</sub> =100uA	250		V	
Forward Valtage	V <sub>F</sub>	I <sub>F</sub> =100mA		1.00	V	
Forward Voltage		I <sub>F</sub> =200mA		1.25	V	
Reverse Leakage Current	I <sub>R</sub>	VR=200V		0.1	uA	
Typical junction capacitance	CJ	VR=0V, f=1MHZ		5	pF	
Typical reverse recovery time	Trr	IF=IR=30mA RL=100Ω IRR=0.1 X IR		50	uS	



# **Ratings and Characteristics Curves**

(TA = 25°C unless otherwise noted)

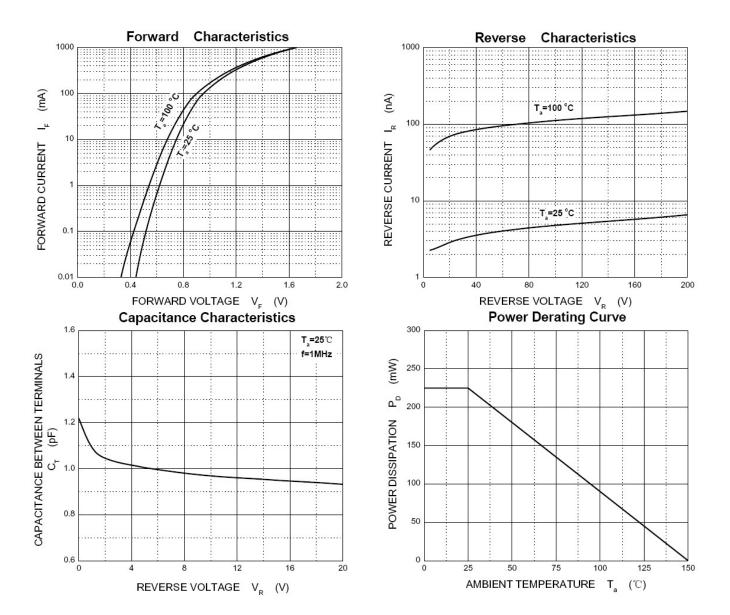

MAX.

1.150

0.100

1.050

0.500

0.150

3.000

1.400

2.550

2.000


0.500





# **Package Outline Dimensions**

in inches (millimeters)

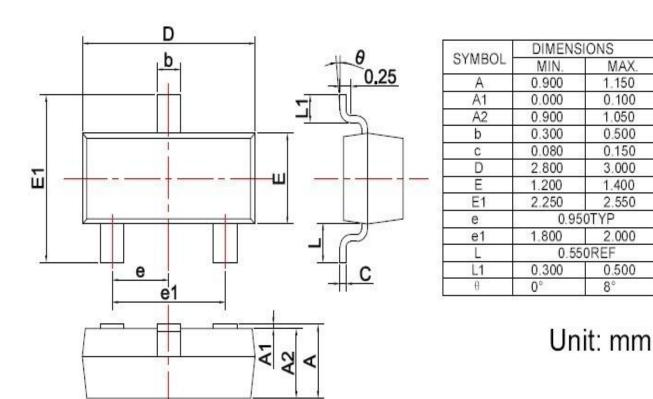

# **Revision History**

Document Version	Date of release	Description of changes
Rev.A	2017.05.26	First issue





### **Disclaimers**

These materials are intended as a reference to assist our customers in the selection of the Suzhou Good-Ark product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Suzhou Good-Ark Electronics Co., Ltd.or a third party.

Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.

All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Suzhou Good-Ark Electronics Co., Ltd. without notice due to product improvements or other reasons. It is therefore recommended that customers contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized Suzhou Good-Ark Electronics Co., Ltd. for the latest product information before purchasing a product listed herein. The information described here may contain technical inaccuracies or typographical errors. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors. Please also pay attention to information published by Suzhou Good-Ark Electronics Co., Ltd. by various means, including our website home page. (http://www.goodark.com)

When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, Please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.

The prior written approval of Suzhou Good-Ark Electronics Co., Ltd. is necessary to reprint or reproduce in whole or in part these materials.

Please contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized distributor for further details on these materials or the products contained herein.