

10A,200V Schottky Barrier Rectifier

Features

- Low forward voltage, low power loss
- Low leakage current
- High surge current
- Plastic package has underwriters Laboratory Flammability Classification 94V-0
- Halogen-free according to IEC 61249-2-21

Applications


- SMPS
- Adapter
- Server Power

Mechanical Data

- Case: Epoxy, Molded
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 sec
- Shipped 2500 units per reel

| Maximum Ratings & Electrical Characteristics(TA=25°C unless otherwise noted) | | | | |
|---|--------|-------------|------|--|
| Parameter | Symbol | MBRD10200CT | Unit | |
| Maximum repetitive peak reverse voltage | Vrrm | 200 | V | |
| Maximum RMS voltage | Vrms | 140 | V | |
| Maximum DC blocking voltage | 200 | V | | |
| Maximum average forward | IF(AV) | 10 | А | |
| Peak forward surge current,8.3ms single half sine-wave superimposed on rated load per diode | IFSM | 110 | А | |
| Operating junction temperature range | TJ | -55 to +150 | °C | |
| Storage temperature range | Tstg | -55 to +150 | °C | |







| Electrical Specifications (TA=25°C unless otherwise noted) | | | | | | |
|--|--------|--------------------|------|------|------|--|
| Parameter | Symbol | Test Conditions | Тур | Max | Unit | |
| | VF | IF=5A, TJ =25℃ | 0.81 | 0.95 | - V | |
| Forward drop voltors (Note1) | | IF=5A, TJ =125℃ | - | 0.88 | | |
| Forward drop voltage ^(Note1) | | IF=10A, TJ =25℃ | - | - | | |
| | | IF=10A, TJ =125℃ | - | - | | |
| Deverse leakage surrent @V/D (Note?) | | TJ =25 ℃ | - | 200 | uA | |
| Reverse leakage current @VR ^(Note2) | IR | Т Ј =100 °С | - | 15 | mA | |

| Thermal-Mechanical Specifications (TA=25°C unless otherwise noted) | | | | |
|--|--------|------|-------|--|
| Parameter | Symbol | Тур | Unit | |
| Thermal Resistance, Junction to Case | Rejc | 3.5 | °C /W | |
| Thermal Resistance, Junction to Ambient | Reja | 62.5 | °C /W | |

Note:

- 1. Pulse test with PW=0.3ms, duty cycle=2%
- 2. Pulse test with PW=30ms



MBRD10200CT GOOD-ARK Electronics

Ratings and Characteristics Curves





Fig.1 – Forward Current Derating Curve



Instantaneous Forward Voltage (V)

Fig.3 – Typical Forward Voltage Characteristics




Fig.5 – Typical Junction Capacitance





Fig.2 – Maximum Non-Repetitive Surge Current



Percent of Rated Peak Reverse Voltage (%)





nstantaneous Reverse Current (uA)



Package Outline Dimensions (Unit: millimeters)

TO-252 (D-PAK)

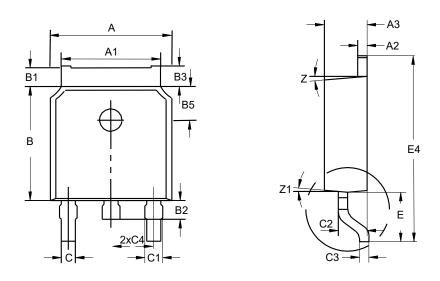


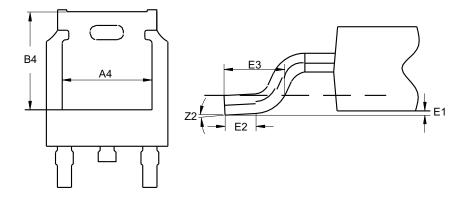

| TO-252 | | | | | | | |
|--------|------|------|------|----|------|------|------|
| | Min. | Nom. | Max. | | Min. | Nom. | Max. |
| А | 6.34 | 6.54 | 6.74 | C1 | 0.65 | 0.85 | 1.05 |
| A1 | 5.1 | 5.3 | 5.5 | C2 | 1.34 | 1.54 | 1.74 |
| A2 | 0.4 | 0.5 | 0.6 | C3 | 0.4 | 0.5 | 0.6 |
| A3 | 2.08 | 2.28 | 2.48 | C4 | 2.09 | 2.29 | 2.49 |
| A4 | 4.6 | 4.8 | 5.0 | Е | 2.6 | 2.9 | 3.2 |
| В | 5.8 | 6.1 | 6.4 | E1 | 0 | | 0.15 |
| B1 | 0.82 | 1.02 | 1.22 | E2 | 0.7 | | |
| B2 | 0.8 | 1 | 1.2 | E3 | 1.3 | 1.6 | 1.9 |
| B3 | 0.9 | 1.1 | 1.3 | E4 | 9.8 | 10.1 | 10.4 |
| B4 | 5.05 | 5.25 | 5.45 | Ζ | | 7° | |
| B5 | 7.83 | 8.03 | 8.23 | Z1 | | 7° | |
| С | 0.56 | 0.76 | 0.96 | Z2 | 0° | | 10° |



Marking Outline

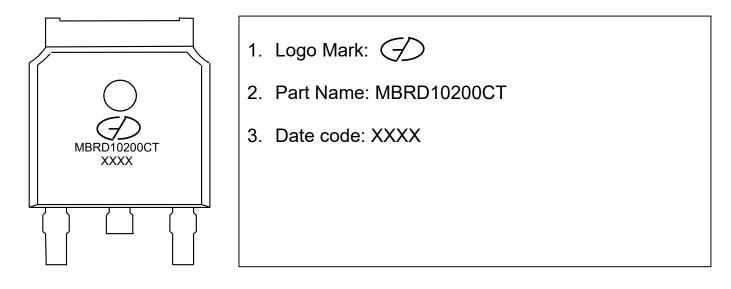

Revision History

| Document Version | Date of release | Description of changes |
|------------------|-----------------|-----------------------------------|
| Rev.A | 2013.12.18 | Released Datasheet |
| Rev.B | 2021.01.23 | Modify document format |
| Rev.C | 2022.03.18 | Modify Peak forward surge current |



Disclaimers

These materials are intended as a reference to assist our customers in the selection of the Suzhou Good-Ark product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Suzhou Good-Ark Electronics Co., Ltd.or a third party.

Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, or infringement of any thirdparty's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.

All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Suzhou Good-Ark Electronics Co., Ltd. without notice due to product improvements or other reasons. It is therefore recommended that customers contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized Suzhou Good-Ark Electronics Co., Ltd. for the latest product information before purchasing a product listed herein. The information described here may contain technical inaccuracies or typographical errors. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors. Please also pay attention to information published by Suzhou Good-Ark Electronics Co., Ltd. by various means, including our website home page. (http://www.goodark.com)

When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, Please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.

The prior written approval of Suzhou Good-Ark Electronics Co., Ltd. is necessary to reprint or reproduce in whole or in part these materials.

Please contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized distributor for further details on these materials or the products contained herein.