


## UltraLow Capacitance ESD/Transient Protection Diode


### Features

- SOD-882 package
- Low leakage current
- Low clamping voltage
- R2R + Zener technology
- Unidirectional configurations
- 60Watts peak pulse power ( $t_p = 8/20\mu s$ )
- Ultra low capacitance ( $C_j=0.3pF$  typ.)
- Protection one data/power line to:
- IEC 61000-4-2  $\pm 10kV$  contact  $\pm 18kV$  air
- IEC 61000-4-4 (EFT) 40A (5/50ns)
- IEC 61000-4-5 (Lightning) 3A (8/20 $\mu s$ )
- RoHS compliant

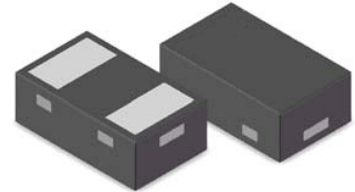

Marking: P

SOD-882



Schematic Diagram

### Applications

- Thunderbolt, Display Port
- USB3.0, Firewire, DVI, HDMI, S-ATA
- Mobile HDMI Link, MDDI, MIPI, SWP / NFC

### Absolute Maximum Ratings ( $T_A=25^\circ C$ unless otherwise noted)

| Parameter                                      | Symbol    | Value       | Unit       |
|--|-----------|-------------|------------|
| Peak Pulse Power ( $T_P=8/20\mu s$ )           | $P_{PP}$  | 60          | W          |
| ESD contact/air discharge (IEC-61000-4-2)      | $V_{ESD}$ | 10/15       | kV         |
| Peak Pulse Current ( $t_P = 8/20\mu s$ )       | $I_{PP}$  | 3           | A          |
| Junction Temperature                           | $T_J$     | -55 to +125 | $^\circ C$ |
| Storage temperature                            | $T_{STG}$ | -55 to +150 | $^\circ C$ |
| MaximumLeadSolderTemperature(10secondduration) | $T_L$     | 260         | $^\circ C$ |

### Electrical Specifications ( $T_A=25^\circ C$ unless otherwise noted)

| Parameter                        | Symbol    | Test Conditions  | Min | Typ | Max  | Unit |
|----------------------------------|-----------|------------------|-----|-----|------|------|
| Reverse stand-off Voltage        | $V_{RWM}$ |                  |     |     | 5.0  | V    |
| Reverse Breakdown Voltage        | $V_{BR}$  | $I_T=1mA$        | 6.5 | 8.5 |      | V    |
| Reverse Leakage Current          | $I_R$     | $V_R=5.0V$       |     | 5   | 100  | nA   |
| Clamping Voltage (IEC 61000-4-5) | $V_C$     | $I_{PP}=3A$      |     |     | 20.5 | V    |
| Trigger Voltage (IEC 61000-4-2)  | $V_T$     | $V_{ESD}=8kV$    |     | 135 |      | V    |
| Clamping Voltage (IEC 61000-4-2) | $V_C$     | $V_{ESD}=8kV$    |     | 20  |      | V    |
| Junction Capacitance             | $C_J$     | $V_R=0V, f=1MHz$ |     | 0.3 | 0.35 | pF   |

## Ratings and Characteristics Curves

( $T_A = 25^\circ\text{C}$  unless otherwise noted)

Fig.1 Peak Pulse Power Rating Curve

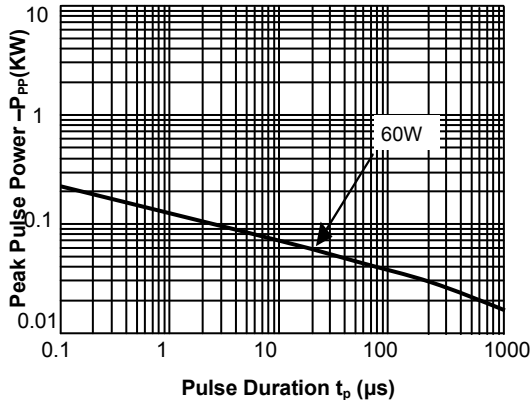


Fig.2 Pulse Derating Curve

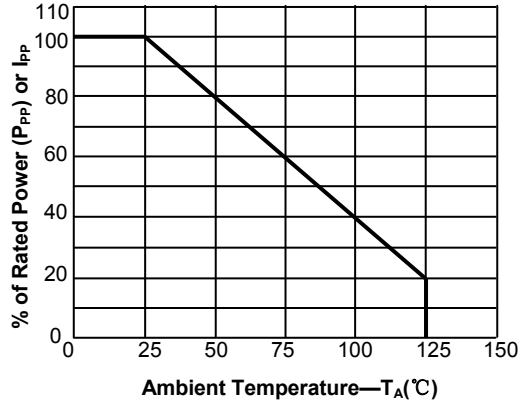


Fig.3 Pulse Waveform-8/20 $\mu\text{s}$

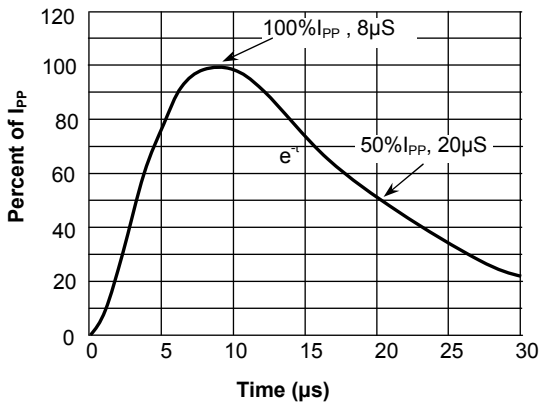


Fig.4 Pulse Waveform-ESD(IEC61000-4-2)

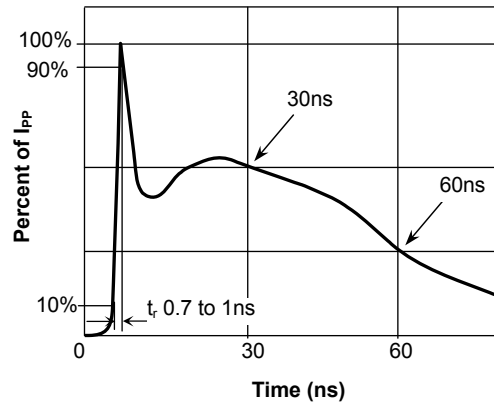


Fig.5 IEC61000-4-2 +8kV Contact Discharge



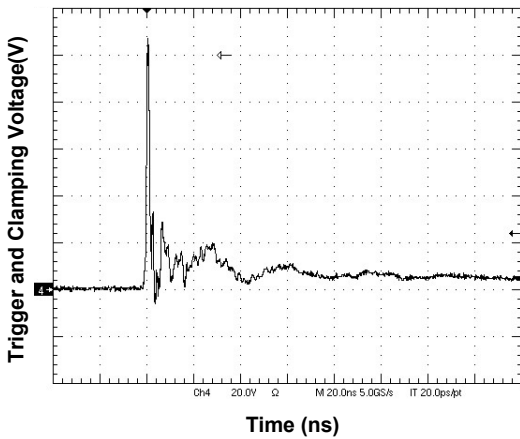


Fig.6 IEC61000-4-2 -8kV Contact Discharge

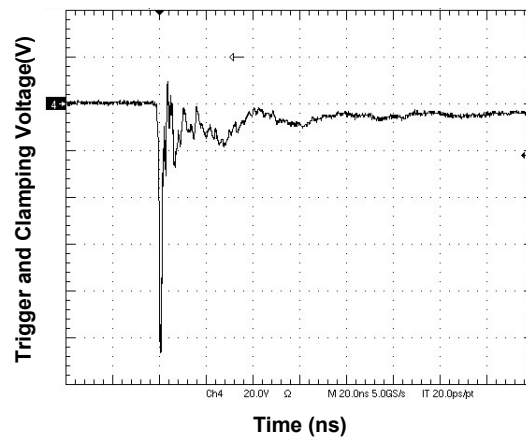


## Package Outline Dimensions

in inches (millimeters)

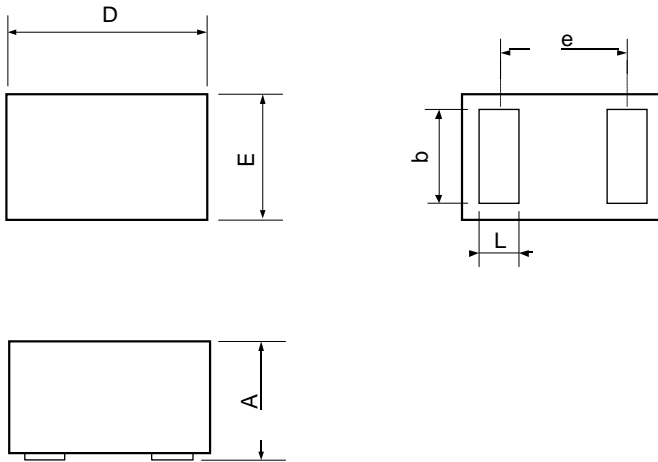

| Symbol | Milimeter |      |      |
|--------|-----------|------|------|
|        | min       | nom  | max  |
| D      | 0.95      | 1.00 | 1.05 |
| E      | 0.55      | 0.60 | 0.65 |
| A      | 0.45      | 0.50 | 0.55 |
| b      | 0.45      | 0.50 | 0.55 |
| L      | 0.20      | 0.25 | 0.30 |
| e      | 0.65BSC   |      |      |

## Part Number System

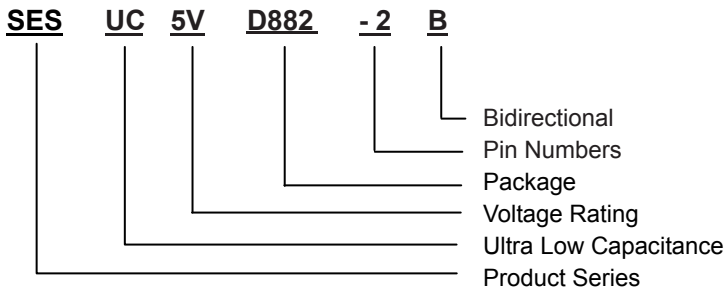

## Revision History

| Document Version | Date of release | Description of changes |
|------------------|-----------------|------------------------|
| Rev.A            | 2021.06.01      | First issue            |
|                  |                 |                        |
|                  |                 |                        |

## **Disclaimers**

These materials are intended as a reference to assist our customers in the selection of the Suzhou Good-Ark product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Suzhou Good-Ark Electronics Co., Ltd. or a third party.

Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.

All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Suzhou Good-Ark Electronics Co., Ltd. without notice due to product improvements or other reasons. It is therefore recommended that customers contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized Suzhou Good-Ark Electronics Co., Ltd. for the latest product information before purchasing a product listed herein. The information described here may contain technical inaccuracies or typographical errors. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors. Please also pay attention to information published by Suzhou Good-Ark Electronics Co., Ltd. by various means, including our website home page.

(<http://www.goodark.com>)

When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, Please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.

The prior written approval of Suzhou Good-Ark Electronics Co., Ltd. is necessary to reprint or reproduce in whole or in part these materials.

Please contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized distributor for further details on these materials or the products contained herein.