

SGC0350S thru SGC0365S

GOOD-ARK Electronics

3A,50-65V Schottky Barrier Rectifiers

Features

- Low leakage current
- Schottky barrier diodes
- Low forward voltage drop
- Very low profile typical height of 1.1 mm
- Moisture sensitivity: level 1, per J-STD-020
- Halogen-free according to IEC 61249-2-21 definition
- High temperature soldering guaranteed: 260°C/10 seconds



Applications

For use of fast switching in RF module, lighting, cellular phone, portable device, power supplies and other consumer applications.

Maximum Ratings & Electrical Characteristics(TA=25°C unless otherwise noted)					
Parameter	Symbol	SGC0350S	SGC0360S	SGC0365S	Unit
Maximum repetitive peak reverse voltage	Vrrm	50	60	65	V
Maximum RMS voltage	V _{RMS}	35	42	45.5	V
Maximum DC blocking voltage	V _{DC}	50	60	65	V
Maximum average forward rectified current	IF(AV)		3		А
Peak forward surge current,8.3ms single half sine-wave superimposed on rated load per diode	I _{FSM}		100		A
Operating junction temperature range	TJ	-55 to +150		°C	
Storage temperature range	Тѕтс		-55 to +150		°C

Thermal-Mechanical Specifications (TA=25°C unless otherwise noted)				
Parameter	Symbol	Тур	Unit	
Thermal Resistance, Junction to Ambient	Reja	40	°C /W	
Thermal Resistance, Junction to Case	Rejc	15	°C /W	
Thermal Resistance, Junction to Lead	Rejl	7	°C /W	



SGC0350S thru SGC0365S GOOD-ARK Electronics

Electrical Specifications(TA=25°C unless otherwise noted)							
Parameter	Symbol	Test Conditions	SGC0350S	SGC0360S	SGC0365S	Unit	
Maximum forward drop voltage	VF	l⊧=3A		0.70		~	
Maximum reverse leakage current @V _R		TJ =25℃		0.30		— mA	
	IR	T」=125℃		50			
Typical junction capacitance	CJ	4.0V 1 MHZ		160		pF	

Note:


1. Mounted on copper pad area of 30 x 30mm to each terminal.



SGC0350S thru SGC0365S GOOD-ARK Electronics

Ratings and Characteristics Curves

(TA = 25°C unless otherwise noted)








Figure 3. Typical Reverse Characteristics




Figure 5. Typical Junction Capacitance

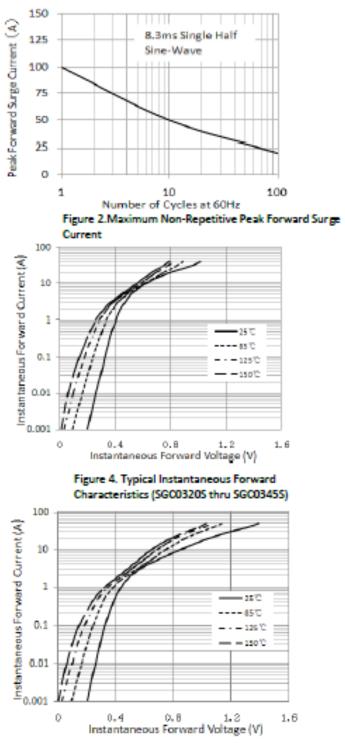


Figure 6. Typical Instantaneous Forward Characteristics (SGC0350S thru SGC0365S)





SGC0350S thru SGC0365S GOOD-ARK Electronics

Package Outline Dimensions


in inches (millimeters)

eSGC (TO-277B)





			_		
DIM	Unit: mm		Unit: inch		
	MIN	MAX	MIN	MAX	
HE	6.4	6.6	0.252	0.260	
E	5.6	5.8	0.220	0.228	
D	4.1	4.3	0.161	0.169	
B1	1.7	1.9	0.067	0.075	
B2	0.8	1	0.031	0.039	
Α	1.05	1.2	0.041	0.047	
C	0.3	0.4	0.012	0.016	
L	0.85	1.1	0.033	0.043	
L1	4.2	4.4	0.165	0.173	
L2	3.52 Typ.		0.139 Typ.		
L3	1.1	1.4	0.043	0.055	
D1	3	3.3	0.118	0.130	
E1	1.86 Typ.		0.073	3 Тур.	



Revision History

Document Version	Date of release	Description of changes
Rev.A	2021.06.01	Released Datasheet
Rev.B	2023.10.11	Modify document format
Rev.C	2023.12.29	Modify package name



SGC0350S thru SGC0365S

GOOD-ARK Electronics

Disclaimers

These materials are intended as a reference to assist our customers in the selection of the Suzhou Good-Ark product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Suzhou Good-Ark Electronics Co., Ltd.or a third party.

Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, or infringement of any thirdparty's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.

All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Suzhou Good-Ark Electronics Co., Ltd. without notice due to product improvements or other reasons. It is therefore recommended that customers contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized Suzhou Good-Ark Electronics Co., Ltd. for the latest product information before purchasing a product listed herein. The information described here may contain technical inaccuracies or typographical errors. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors. Please also pay attention to information published by Suzhou Good-Ark Electronics Co., Ltd. by various means, including our website home page. (http://www.goodark.com)

When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, Please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.

The prior written approval of Suzhou Good-Ark Electronics Co., Ltd. is necessary to reprint or reproduce in whole or in part these materials.

Please contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized distributor for further details on these materials or the products contained herein.