

Silicon Schottky Barrier Diode

Features

- High surge capability
- Low forward voltage drop
- Small surface mounting type
- Ideal for automated placement
- Ultrafast reverse recovery time
- Low power losses, high efficiency

Applications


- Low Voltage
- Free Wheeling
- Switching circuit
- High-Frequency Inverters

Mechanical Characteristics

- Package: SOD-523
- Marking Information: See Below
- Case Material: "Green" Molding Compound
- UL Flammability Classification Rating 94V-0
- Terminal Connections: See Diagram Below


Description

SKY diodes is made of the principle of metal- semiconductor junction formed by the contact between metal and semiconductor .Therefore, SKY is also known as metal-semiconductor (contact) diode or surface barrier diode, which is a hot carrier diode



Marking: SL

SOD-523

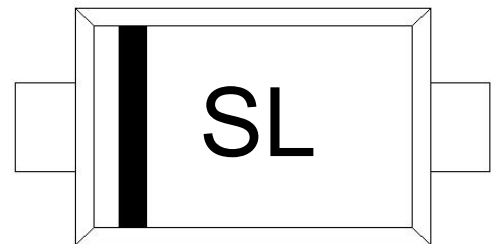

Schematic Diagram







Absolute Maximum Ratings (T _A =25°C unless otherwise noted)			
Parameter	Symbol	Limit	Unit
Non-repetitive peak reverse voltage	V _{RM}	40	V
Peak Repetitive Peak Reverse Voltage	V _{RRM}	40	V
Working Peak Reverse Voltage	V _{RWM}	40	V
DC Blocking Voltage	V _R	40	V
RMS reverse voltage	V _{R(RMS)}	28	V
Average rectified output current	I _O	1	A
Non-repetitive Peak Forward Surge Current@t=8.3ms	I _{FSM}	5	A
Power Dissipation	P _D	250	mW
Thermal Resistance Junction to Ambient	R _{θJA}	400	°C/W
Junction temperature	T _J	125	°C
Storage Temperature	T _{STG}	-55 ~ +150	°C

Electrical Specifications(T _A =25°C unless otherwise noted)						
Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Reverse Breakdown Voltage	V _{BR}	I _R = 1mA	40			V
Reverse Leakage Current	I _R	V _R = 40V			1	mA
Forward Voltage	V _F	I _F = 0.5A			0.38	V
		I _F = 1.0A			0.6	V
Total Capacitance	C _T	V _R = 4V, f = 1.0MHz			120	pF


Ratings and Characteristics Curves

($T_A = 25^\circ\text{C}$ unless otherwise noted)

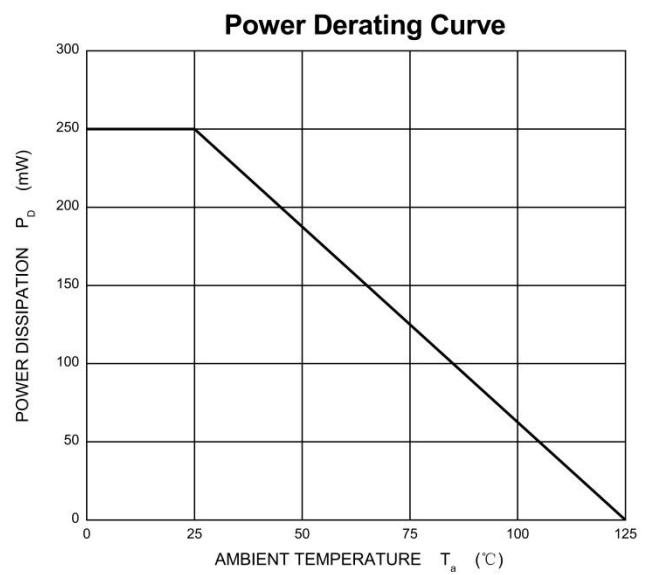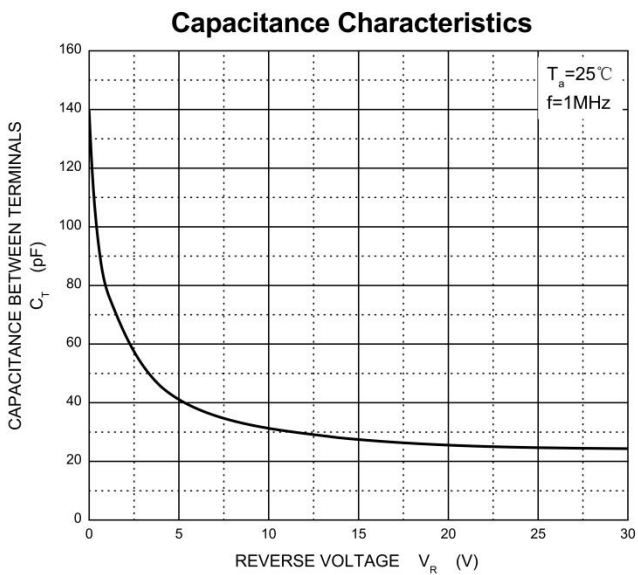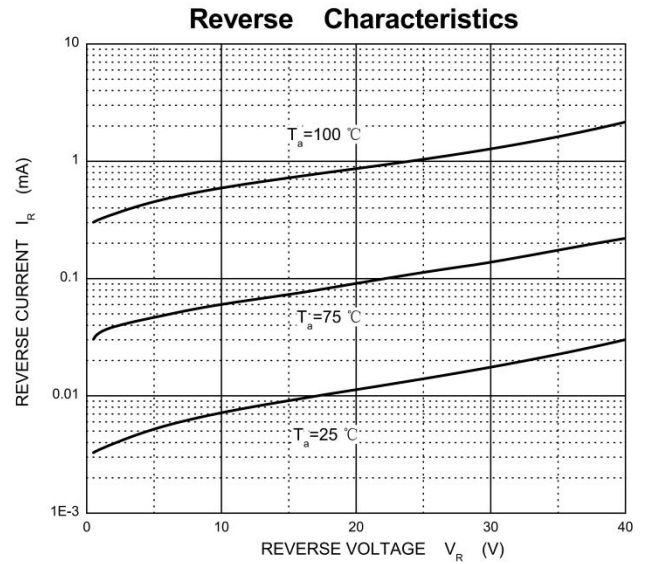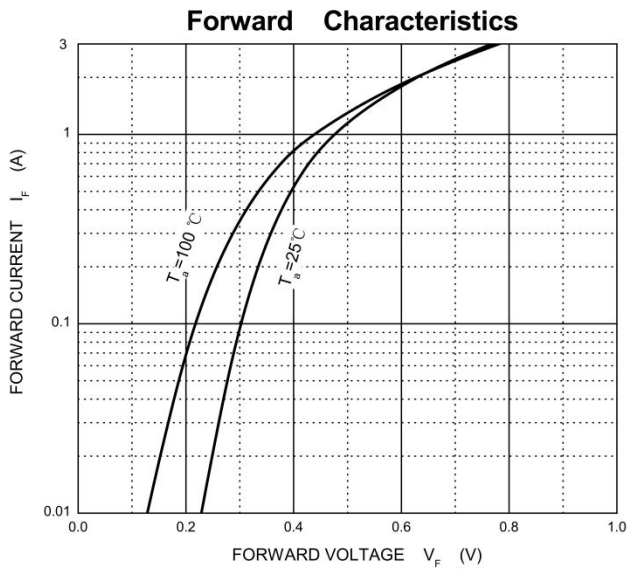


Soldering Parameters

Reflow Condition		Pb -Free assembly (see as bellow)
Pre Heat	-Temperature Min ($T_{s(min)}$)	+150 °C
	-Temperature Max($T_{s(max)}$)	+200 °C
	-Time (Min to Max) (t_s)	60 -180 secs.
Average ramp up rate (Liquid us Temp (T_L) to peak)		3°C /sec. Max
$T_{s(max)}$ to T_L - Ramp -up Rate		3°C /sec. Max
Reflow	-Temperature(T_L) (Liquid us)	+217 °C
	-Temperature(t_L)	60 -150 secs.
Peak Temp (T_p)		+260(+0/ -5) °C
Time within 5 °C of actual Peak Temp (t_p)		30 secs. Max
Ramp -down Rate		6°C /sec. Max
Time 25 °C to Peak Temp (T_P)		8 min. Max
Do not exceed		+260 °C

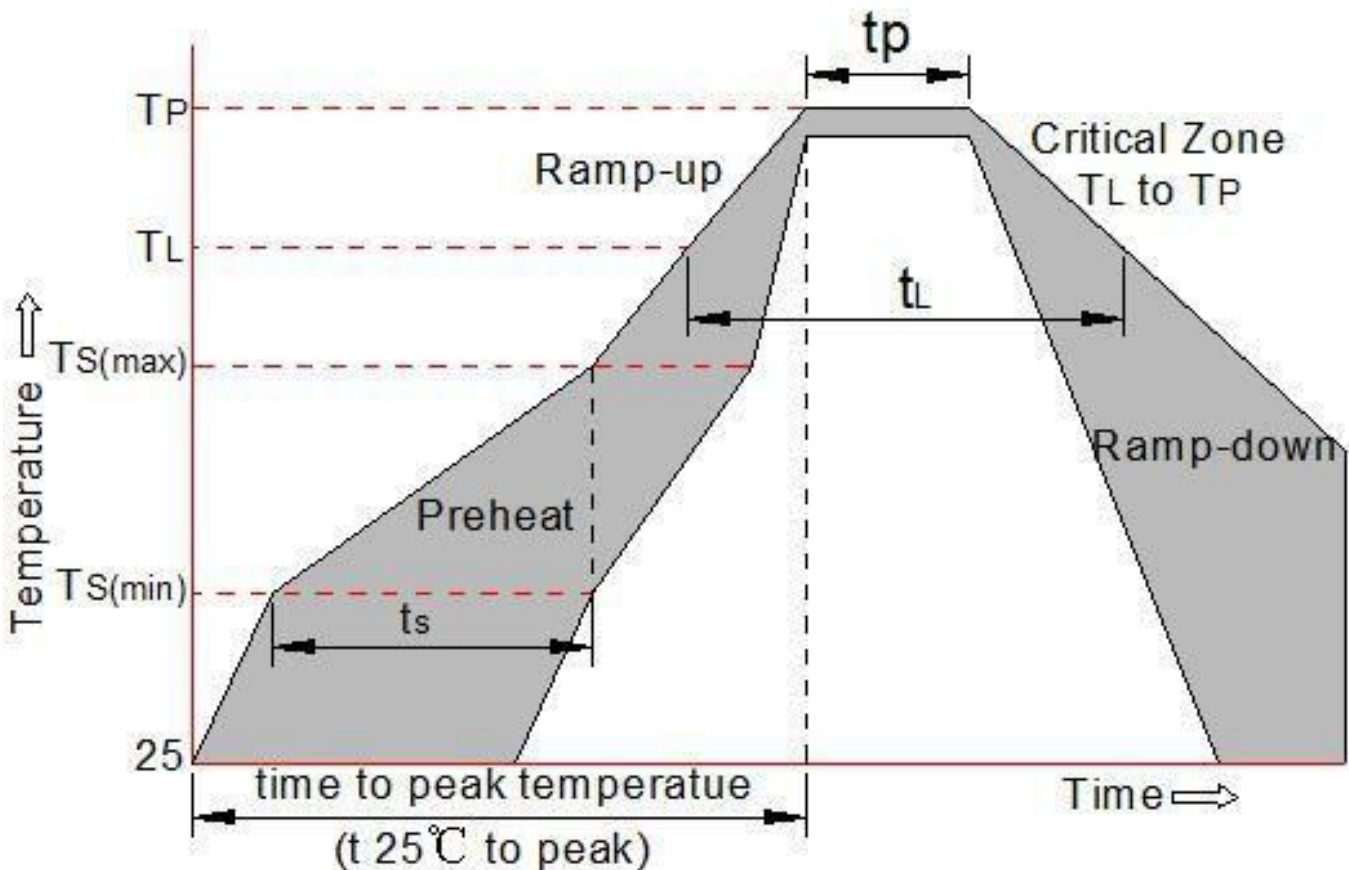

Package Outline Dimensions

in inches (millimeters)

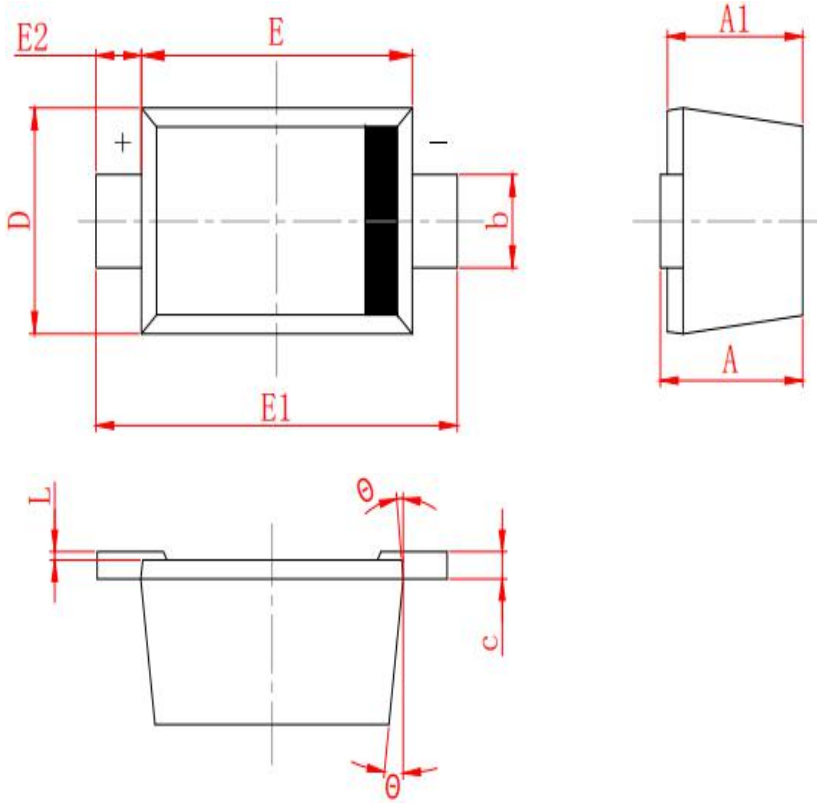

SYMBOL	MILLIMETER	
	MIN	MAX
A	0.530	0.730
A1	0.500	0.700
b	0.280	0.380
c	0.080	0.150
D	0.750	0.850
E	1.100	1.300
E1	1.500	1.700
E2	0.200 REF	
L	0.010	0.070
θ	7° REF	

Revision History

Document Version	Date of release	Description of changes
Rev.A	2022.05.10	First issue

Disclaimers

These materials are intended as a reference to assist our customers in the selection of the Suzhou Good-Ark product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Suzhou Good-Ark Electronics Co., Ltd. or a third party.

Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.

All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Suzhou Good-Ark Electronics Co., Ltd. without notice due to product improvements or other reasons. It is therefore recommended that customers contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized Suzhou Good-Ark Electronics Co., Ltd. for the latest product information before purchasing a product listed herein. The information described here may contain technical inaccuracies or typographical errors. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors. Please also pay attention to information published by Suzhou Good-Ark Electronics Co., Ltd. by various means, including our website home page.

(<http://www.goodark.com>)

When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, Please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.

The prior written approval of Suzhou Good-Ark Electronics Co., Ltd. is necessary to reprint or reproduce in whole or in part these materials.

Please contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized distributor for further details on these materials or the products contained herein.