

## ESD Diode

### Features



- Up to 2 lines protects
- Junction capacitance (Max value:90pF)
- Peak Pulse current (8/20µs) MAX: 12A
- IEC61000-4-2 (ESD) ±30kV (air), ±30kV (contact)
- Low leakage current
- Working voltages:12V
- RoHS Compliant

### Applications


- Cellular Handsets and Accessories
- Personal Digital Assistants
- Notebooks and Handhelds
- Portable Instrumentation
- Set Top Box
- Industrial Controls
- Server and Desktop PC

### Mechanical Characteristics


- Package: SOT-23
- Ideal for Automated Placement
- Case Material: “Green” Molding Compound
- UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 3 per J-STD-020

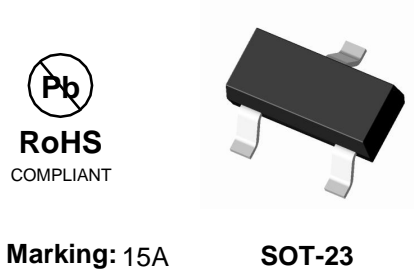

#### Pin definition



#### Equivalent circuit

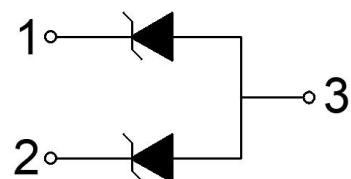

### Absolute Maximum Ratings (T<sub>A</sub>=25°C unless otherwise noted)

Parameter	Symbol	Limit	Unit
Peak Pulse Power (tp=8/20μs waveform)	P <sub>PP</sub>	300	W
Peak Pulse Current (8/20μs)	I <sub>PP</sub>	12	A
ESD per IEC 61000-4-2 (Air)	V <sub>ESD</sub>	±30	KV
ESD per IEC 61000-4-2 (Contact)		±30	KV
Forward voltage @IF=10mA	V <sub>F</sub>	0.9	V
Operating Temperature Range	T <sub>J</sub>	-55 to +125	°C
Storage Temperature Range	T <sub>stg</sub>	-55 to +150	°C

### Electrical Specifications (T<sub>A</sub>=25°C unless otherwise noted)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Reverse Working Voltage	V <sub>RWM</sub>				12	V
Reverse Breakdown Voltage	V <sub>(BR)R</sub>	I <sub>R</sub> = 1mA	14.2		15.8	V
Reverse Leakage Current	I <sub>R</sub>	V <sub>R</sub> = 12V			1	uA
Clamping Voltage	V <sub>C</sub>	I <sub>PP</sub> = 1A (8 x 20uS pulse)			20	V
Clamping Voltage	V <sub>C</sub>	I <sub>PP</sub> = 12A (8 x 20uS pulse)			25	V
		V <sub>R</sub> = 0V, f = 1MHz		60	90	pF

## Ratings and Characteristics Curves

(TA = 25°C unless otherwise noted)

FIG1: Power rating derating curve

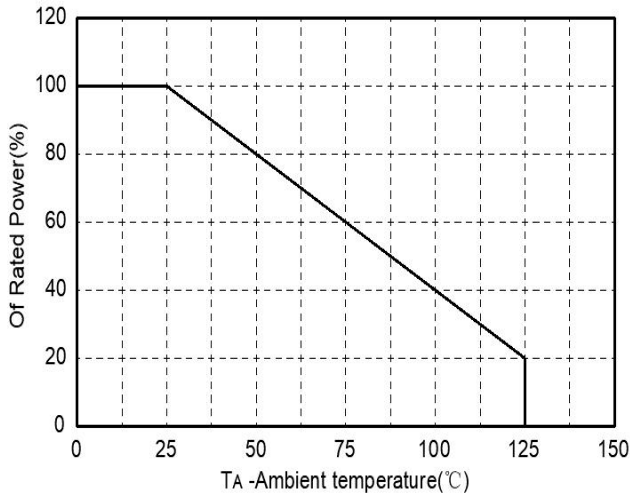


FIG2: pulse Waveform

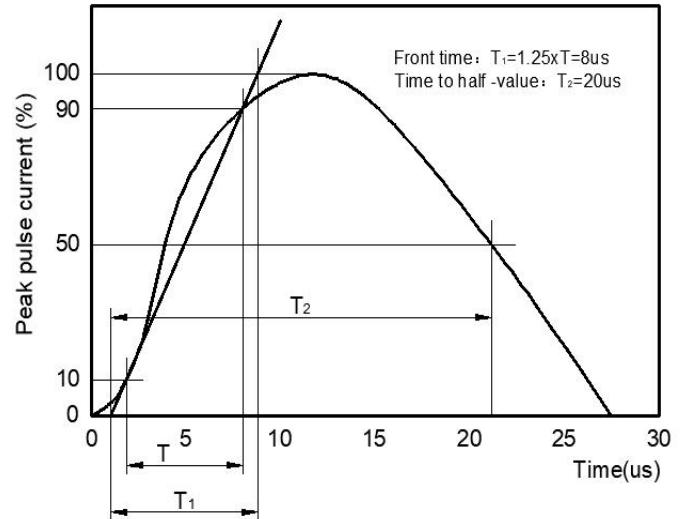


FIG3: Capacitance between terminals characteristics



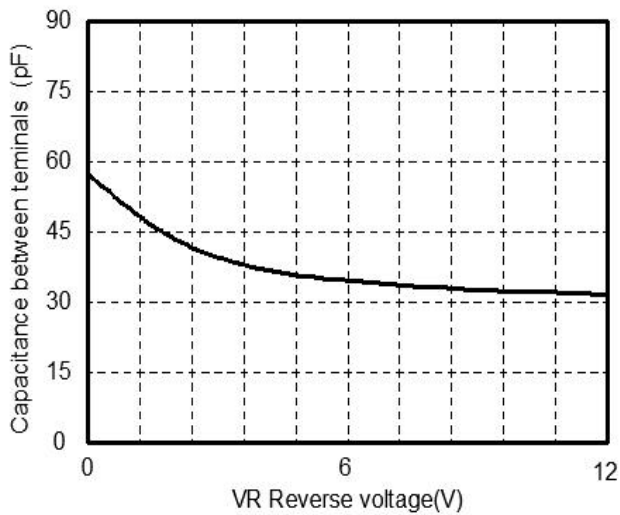


FIG4: Clamping Voltage vs. Peak Pulse Current

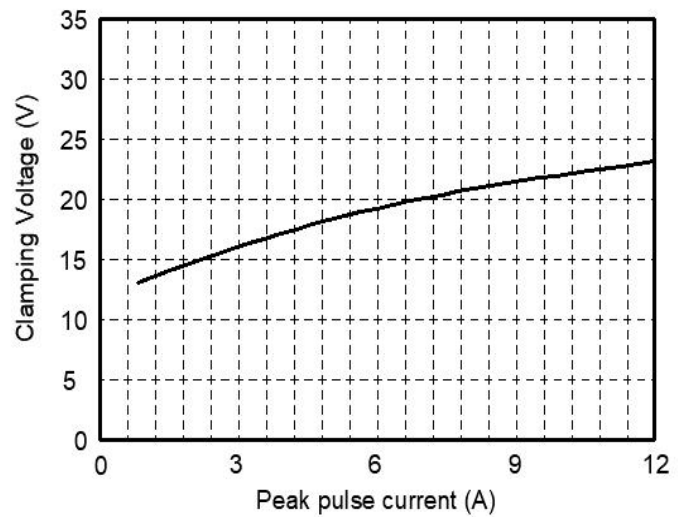


## Soldering Parameters

Reflow Condition		Pb -Free assembly (see as bellow)
Pre Heat	-Temperature Min ( $T_{s(min)}$ )	+150 °C
	-Temperature Max( $T_{s(max)}$ )	+200 °C
	-Time (Min to Max) ( $t_s$ )	60 -180 secs.
Average ramp up rate (Liquid us Temp ( $T_L$ ) to peak)		3 °C /sec. Max
$T_{s(max)}$ o $T_L$ - Ramp -up Rate		3 °C /sec. Max
Reflow	-Temperature( $T_L$ ) (Liquid us)	+217 °C
	-Temperature( $t_L$ )	60 -150 secs.
Peak Temp ( $T_p$ )		+260(+0/ -5) °C
Time within 5 °C of actual Peak Temp ( $t_p$ )		30 secs. Max
Ramp -down Rate		6 °C /sec. Max
Time 25 °C to Peak Temp ( $T_P$ )		8 min. Max
Do not exceed		+260 °C

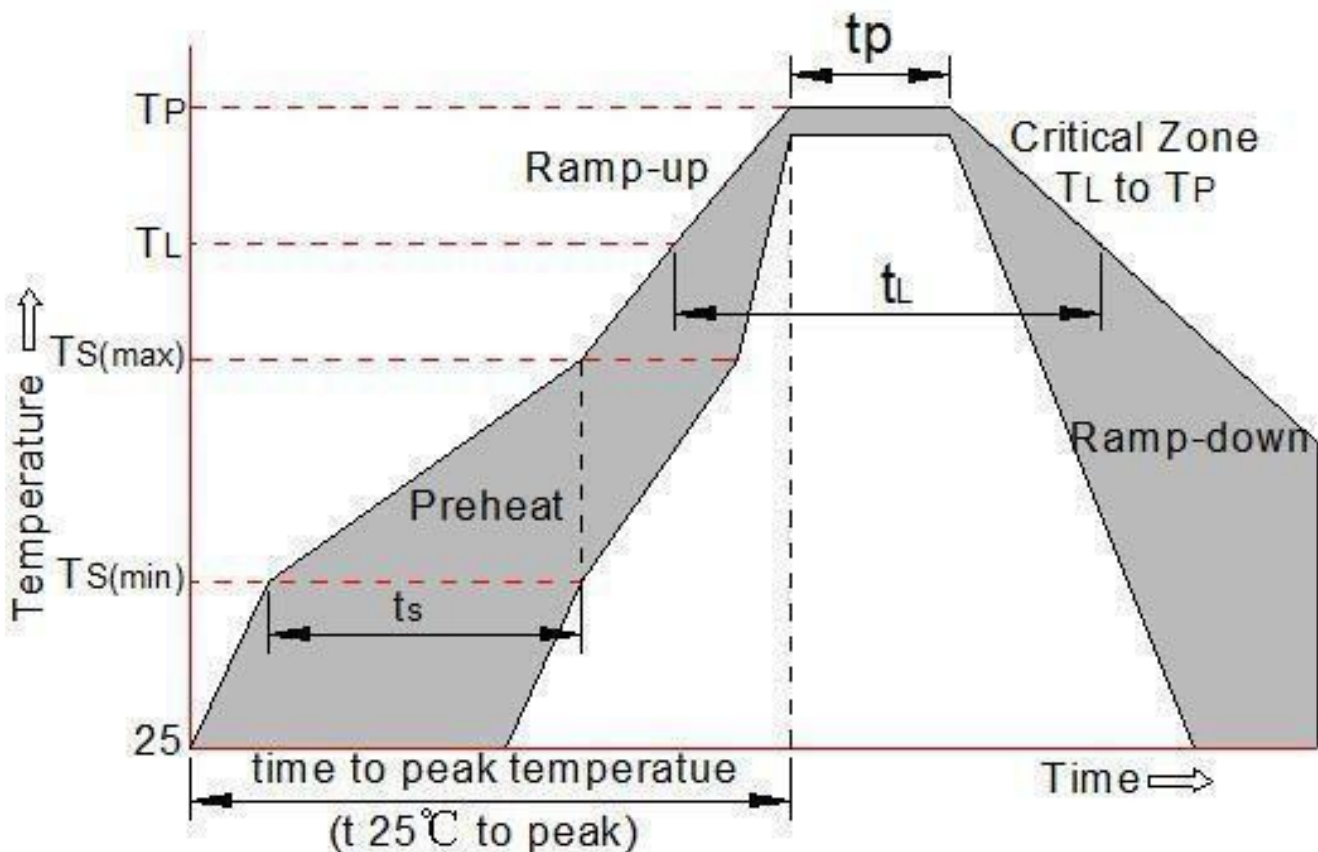

## Package Outline Dimensions

in inches (millimeters)

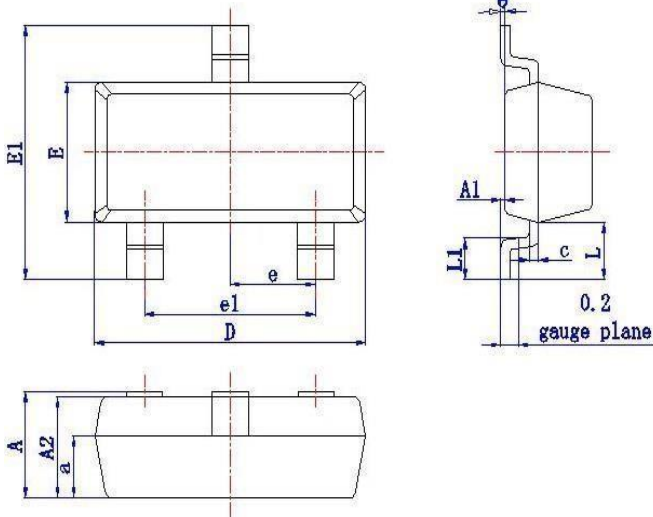

Symbol	Dimensional	
	Millimeters	
	min	max
A	0.9	1.15
A1	0	0.1
A2	0.9	1.05
a	(0.6)	
D	2.8	3.0
E	1.2	1.4
E1	2.25	2.55
e	(0.95)	
e1	1.8	2.0
b	0.3	0.5
c	0.08	0.15
L	(0.55)	
L1	0.3	0.5
$\theta$	0°	8°

## Part Number System

**S E N 12 3 2 S2 --X** (Notice1)



## Revision History

Document Version	Date of release	Description of changes
Rev.A	2022.05.10	First issue

## Disclaimers

These materials are intended as a reference to assist our customers in the selection of the Suzhou Good-Ark product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Suzhou Good-Ark Electronics Co., Ltd. or a third party.

Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.

All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Suzhou Good-Ark Electronics Co., Ltd. without notice due to product improvements or other reasons. It is therefore recommended that customers contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized Suzhou Good-Ark Electronics Co., Ltd. for the latest product information before purchasing a product listed herein. The information described here may contain technical inaccuracies or typographical errors. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors. Please also pay attention to information published by Suzhou Good-Ark Electronics Co., Ltd. by various means, including our website home page.

(<http://www.goodark.com>)

When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, Please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.

The prior written approval of Suzhou Good-Ark Electronics Co., Ltd. is necessary to reprint or reproduce in whole or in part these materials.

Please contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized distributor for further details on these materials or the products contained herein.